

## Yuasa Scheda Tecnica

### Yuasa DCB8125-8(ET) Pro-Spec Deep Cycle Battery

#### Specifiche tecniche


Tensione Nominale (V)	8
5-hr rate Capacity to 10.5V at 20°C (Ah)	190
20-hr rate Capacity to 10.5V at 20°C (Ah)	240
Capacità @ 75A (min)	110
Capacità @ 25A (min)	425

#### Capacità alla scarica in 5 ore con temperatura variabile

40°C	105%
30°C	100%
0°C	80%

#### Dimensioni

Lunghezza (mm)	262
Profondità (mm)	181
Altezza (mm)	283
Altezza poli inclusi (mm)	316
Peso (kg)	37.6


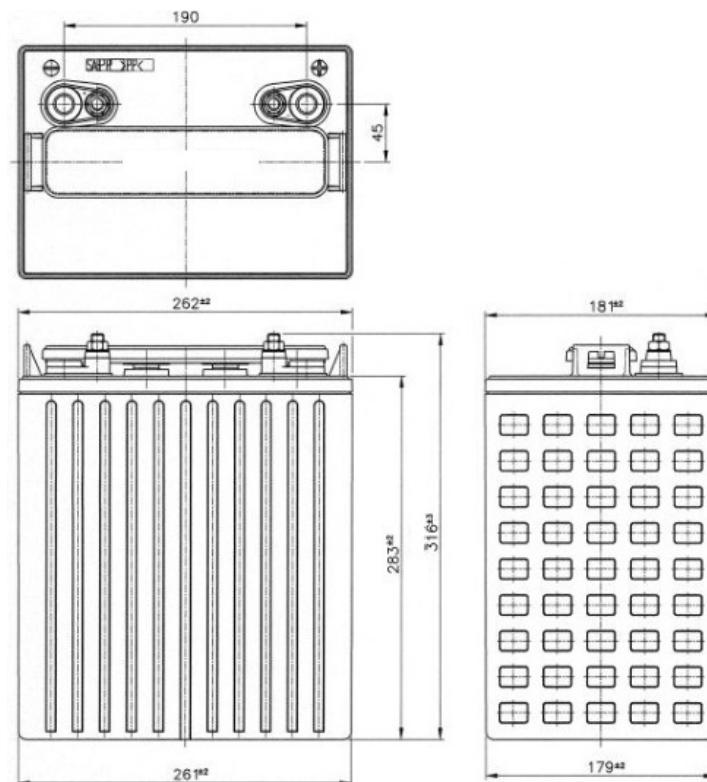


#### Specifiche dei materiali

Tipo di coperchio	: Rimovibile- Manutenzione Possibile
Tipo di valvola di sfiato	: Gang style
Materiale del monoblocco & coperchio	: Polipropilene nero
Metodo di sigillatura del coperchio	: Sigillatura a caldo
Connessione intercella	: Saldatura divisoria passante
Sistema di saldatura piastre	: Fusione automatica
Materiale piastra positiva	: Lega in alluminio-antimonio
Materiale piastra negativa	: Lega in alluminio-antimonio

POSITIVE TERMINAL S=NS

NEGATIVE TERMINAL S=NS

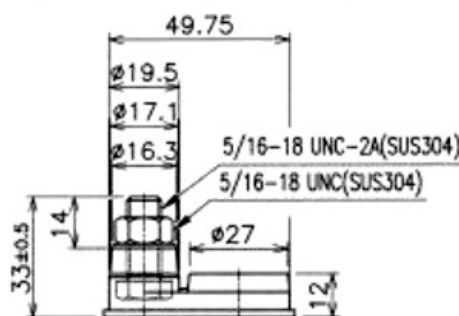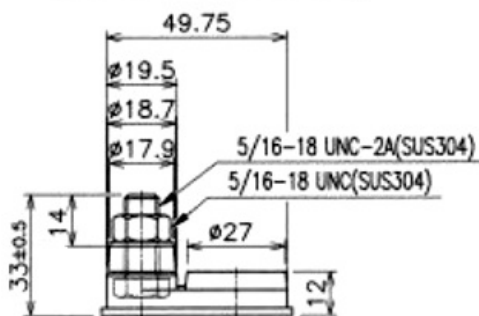

Scheda tecnica prodotta su E&OE

## Yuasa Technical Data Sheet

### Yuasa DCB8125-8(ET) Pro-Spec Deep Cycle Battery

#### Specifications


Nominal voltage (V)	8
5-hr rate Capacity to 10.5V at 20°C (Ah)	190
20-hr rate Capacity to 10.5V at 20°C (Ah)	240
Capacity @ 75A (mins)	110
Capacity @ 25A (mins)	425

#### 5-Hr Capacity By Temperature

40°C	105%
30°C	100%
0°C	80%



#### Dimensions

Length (mm)	262
Width (mm)	181
Height (mm)	283
Height over terminals (mm)	316
Mass (kg)	37.6

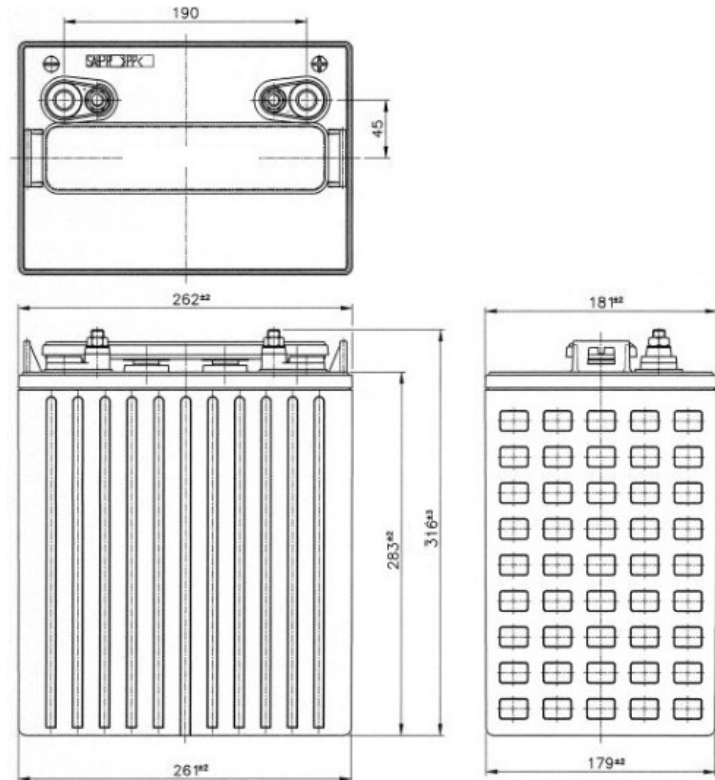

#### Material Specifications

Cover Style	: Removable - Maintenance Possible
Cover Vent Style	: Gang style
Container & Cover Material	: Black polypropylene plastic
Case to Cover Seal Method	: Heat sealing
Inner Cell Connector Type	: Through-partition weld
Plate Lug Weld Method	: Automated cast-on process
Positive Grid Material	: Antimony lead alloy
Negative Grid Material	: Antimony lead alloy

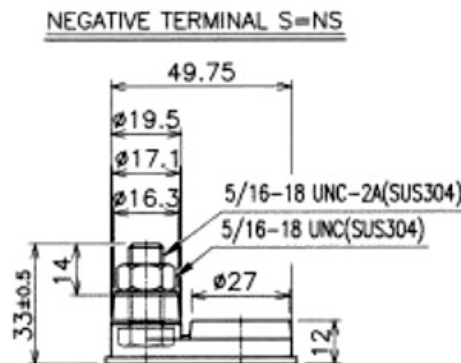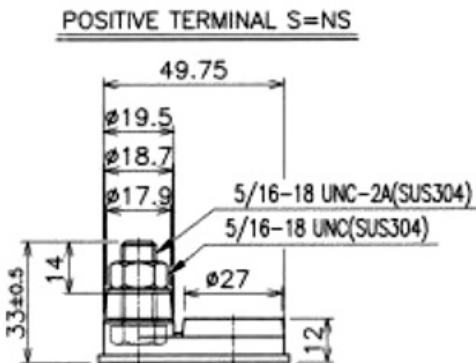

Data Sheet generated on 26/10/2021 - E&OE