



Yuasa Scheda Tecnica

Yuasa HJ-S34B20L-A

Prestazione

Tensione	12V
Capacità (20 ore)	35Ah
Corrente di spunto A (EN1)	272A

Dimensioni

Lunghezza	197mm
Profondità	129mm
Altezza	227mm

Pesi e Misure

Peso medio con acido	10.5kg
----------------------	--------



Caratteristiche del Monoblocco

Tipo di monoblocco	B20 JIS AGM
Fissaggi alla base	N
Maniglie	✓
Circuito di sfiato	✓
Applicazioni da semi trazione	✓
Tipo di coperchio	VRLA


Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca VRLA
Separatore	AGM
Vibrazioni	V1 (30Hz/3g/2hr)
Corrente di carica raccomandata	2A
Performance Marking	W5-C2-V2-E2


Tipologia dei terminali

T3

Small Japanese
JIS Terminal



Schema di Collegamento

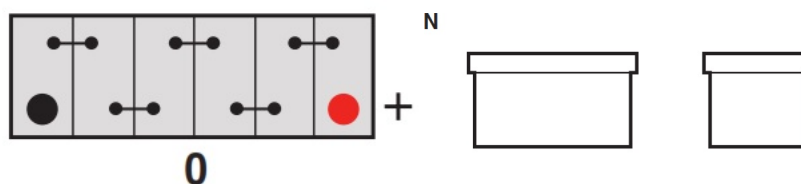

Fissaggio batteria

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa HJ-S34B20L-A

Performance

Voltage	12V
Capacity (20-hour)	35Ah
Cold Cranking Amps (EN1)	272A

Dimensions

Length	197mm
Width	129mm
Height	227mm

Weights & Measures

Mean Weight with Acid	10.5kg
-----------------------	--------



Container Features

Case Type	B20 JIS AGM
Hold Down	N
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	2A
Performance Marking	W5-C2-V2-E2

Terminal Type

T3


Small Japanese
JIS Terminal



Positive Terminal

Negative Terminal

Cell Assembly Layout

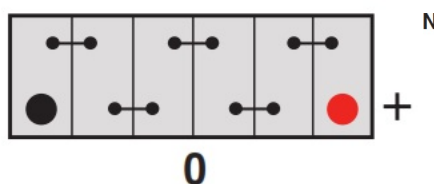

Battery Hold-down



Data Sheet generated on 28/04/2024 – E&OE