



## Yuasa Scheda Tecnica

### Yuasa HJ-S46B24R - Batterie Ausiliarie, di Backup e usi Specifici

#### Prestazione

Tensione	12V
Capacità (20 ore)	45Ah
Corrente di spunto A (EN1)	325A

#### Dimensioni

Lunghezza	238mm
Profondità	129mm
Altezza	227mm

#### Pesi e Misure

Peso medio con acido	12.7kg
----------------------	--------



#### Caratteristiche del Monoblocco


Tipo di monoblocco	B24 JIS AGM
Schema polarità	1
Fissaggi alla base	N
Maniglie	✓
Applicazioni da semi trazione	✓
Tipo di coperchio	VRLA

#### Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca VRLA
Separatore	AGM
Corrente di carica raccomandata	3A
Performance Marking	W5-C2-V2-E2


#### Tipologia dei terminali

**T3**  
Small Japanese  
JIS Terminal



Positive Terminal Negative Terminal

#### Schema di Collegamento

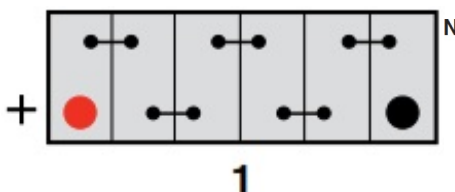

#### Fissaggio batteria



Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa HJ-S46B24R - Auxilliary, Backup & Specialist Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	325A

#### Dimensions

Length	238mm
Width	129mm
Height	227mm

#### Weights & Measures

Mean Weight with Acid	12.7kg
-----------------------	--------



#### Container Features


Case Type	B24 JIS AGM
Cell Layout	1
Hold Down	N
Handles	✓
Semi-Traction Features	✓
Lid Type	VRLA

#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
Recommended Charge Rate	3A
Performance Marking	W5-C2-V2-E2


#### Terminal Type

**T3**  
Small Japanese  
JIS Terminal



Positive Terminal Negative Terminal

#### Cell Assembly Layout

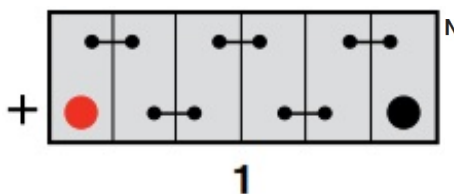

#### Battery Hold-down



Data Sheet generated on 21/04/2025 – E&OE