



## Yuasa Scheda Tecnica

### Yuasa L36-EFB - Batterie per tempo libero

#### Prestazione

|                            |        |
|----------------------------|--------|
| Tensione                   | 12V    |
| Capacità (20 ore)          | 100Ah  |
| Corrente di spunto A (EN1) | 850A   |
| Marine Cranking Amps (MCA) | 1050A  |
| Watt Hour                  | 1200Wh |

#### Dimensioni

|            |       |
|------------|-------|
| Lunghezza  | 353mm |
| Profondità | 175mm |
| Altezza    | 190mm |



#### Pesi e Misure

|                      |      |
|----------------------|------|
| Peso medio con acido | 24kg |
|----------------------|------|

#### Caratteristiche del Monoblocco

|                                  |                      |
|----------------------------------|----------------------|
| Tipo di monoblocco               | L5 DIN EFB           |
| Fissaggi alla base               | B3                   |
| Indicatore dello stato di carica | ✓                    |
| Maniglie                         | ✓                    |
| Circuito di sfiato               | ✓                    |
| Tipo di coperchio                | Doppio Coperchio SMF |

#### Tecnologia

|                                 |       |
|---------------------------------|-------|
| Pastiglia antideflagrante       | ✓     |
| Tecnologia                      | Ca/Ca |
| Separatore                      | PE    |
| Test antiribaltamento VDA       | ✓     |
| Corrente di carica raccomandata | 7A    |


#### Tipologia dei terminali

#### Schema di Collegamento

#### Fissaggio batteria

##### T1

Standard DIN Post

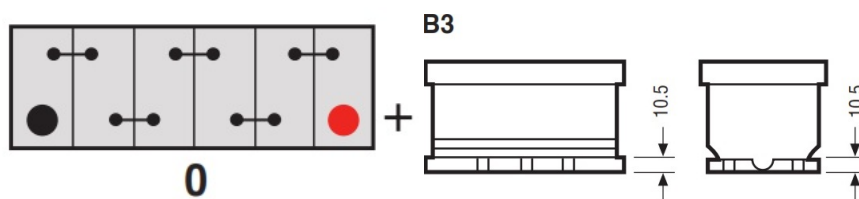

Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa L36-EFB - Leisure Batteries

#### Performance

|                            |        |
|----------------------------|--------|
| Voltage                    | 12V    |
| Capacity (20-hour)         | 100Ah  |
| Cold Cranking Amps (EN1)   | 850A   |
| Marine Cranking Amps (MCA) | 1050A  |
| Watt Hour                  | 1200Wh |

#### Dimensions

|        |       |
|--------|-------|
| Length | 353mm |
| Width  | 175mm |
| Height | 190mm |



#### Weights & Measures

|                       |      |
|-----------------------|------|
| Mean Weight with Acid | 24kg |
|-----------------------|------|

#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | L5 DIN EFB     |
| Hold Down                 | B3             |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Lid Type                  | SMF Double Lid |

#### Technology

|                         |       |
|-------------------------|-------|
| Flame Arrestor          | ✓     |
| Technology              | Ca/Ca |
| Separator               | PE    |
| VDA Roll Over Test      | ✓     |
| Recommended Charge Rate | 7A    |



#### Terminal Type

#### Cell Assembly Layout

#### Battery Hold-down

##### T1

Standard DIN Post

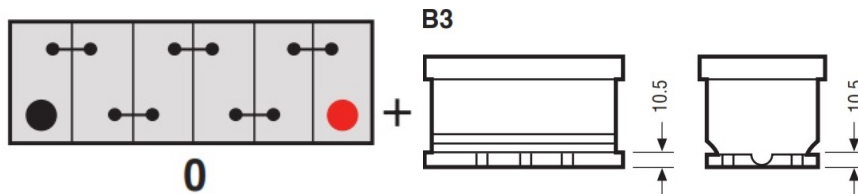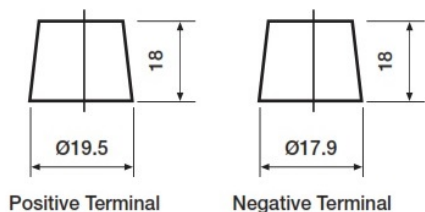

Data Sheet generated on 27/04/2024 - E&OE