



Yuasa Scheda Tecnica

Yuasa YBX1063 - Batterie YBX1000 CaCa

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Prestazione

Tensione	12V
Capacità (20 ore)	40Ah
Corrente di spunto A (EN1)	360A

Dimensioni

Lunghezza	207mm
Profondità	175mm
Altezza	175mm

Pesi e Misure

Peso medio con acido	11.4kg
Volume dell'acido	3 Litri



Caratteristiche del Monoblocco

Tipo di monoblocco	LB1 DIN
Fissaggi alla base	B13/B14
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓
Tipo di coperchio	Valvola di fiato centrale

Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Corrente di carica raccomandata	2A
Performance Marking	W3-C2-V2-E1


Tipologia dei terminali

Schema di Collegamento

Fissaggio batteria


T1

Standard DIN Post

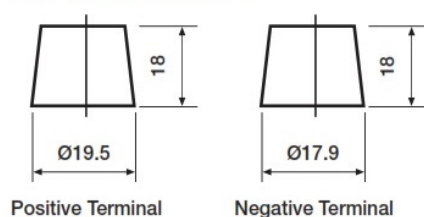


Positive Terminal

Negative Terminal

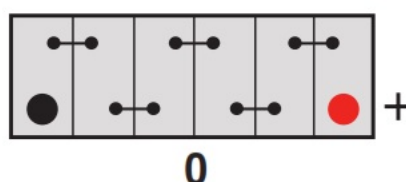

B3/B4 (B3 with Hold-Down adaptor)

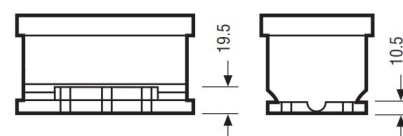

Scheda tecnica prodotta su E&OE



Yuasa Technical Data Sheet

Yuasa YBX1063 - YBX1000 CaCa Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	360A

Dimensions

Length	207mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	11.4kg
Acid Volume	3 litres



Container Features

Case Type	LB1 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	Central Venting


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	2A
Performance Marking	W3-C2-V2-E1


Terminal Type

T1

Standard DIN Post

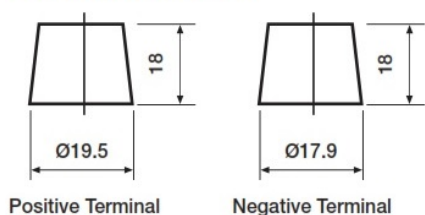


Cell Assembly Layout

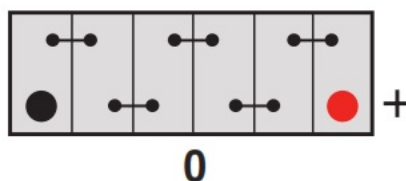

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

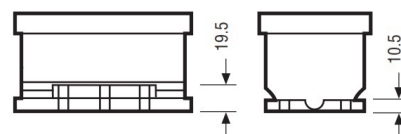

Data Sheet generated on 19/04/2024 - E&OE