



## Yuasa Scheda Tecnica

### Yuasa YBX3625 - Super Heavy Duty Battery

#### Prestazione

|                            |       |
|----------------------------|-------|
| Tensione                   | 12V   |
| Capacità (20 ore)          | 220Ah |
| Corrente di spunto A (EN1) | 1150A |

#### Dimensioni

|            |       |
|------------|-------|
| Lunghezza  | 516mm |
| Profondità | 274mm |
| Altezza    | 236mm |

#### Pesi e Misure

|                      |        |
|----------------------|--------|
| Peso medio con acido | 55.8kg |
|----------------------|--------|



#### Caratteristiche del Monoblocco

|                                  |                      |
|----------------------------------|----------------------|
| Tipo di monoblocco               | DIN C                |
| Schema polarità                  | 3                    |
| Fissaggi alla base               | N                    |
| Indicatore dello stato di carica | ✓                    |
| Maniglie                         | ✓                    |
| Tipo di coperchio                | Doppio Coperchio SMF |

#### Tecnologia

|                                 |             |
|---------------------------------|-------------|
| Pastiglia antideflagrante       | ✓           |
| Tecnologia                      | Ca/Ca       |
| Corrente di carica raccomandata | 11A         |
| Performance Marking             | W3-C2-V4-E2 |


#### Tipologia dei terminali

#### Schema di Collegamento

#### Fissaggio batteria

##### T1

Standard DIN Post

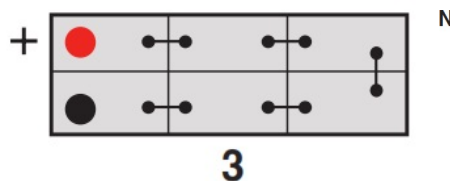

Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX3625 - Super Heavy Duty Battery

#### Performance

|                          |       |
|--------------------------|-------|
| Voltage                  | 12V   |
| Capacity (20-hour)       | 220Ah |
| Cold Cranking Amps (EN1) | 1150A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 516mm |
| Width  | 274mm |
| Height | 236mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 55.8kg |
|-----------------------|--------|



#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | DIN C          |
| Cell Layout               | 3              |
| Hold Down                 | N              |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| Lid Type                  | SMF Double Lid |

#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Recommended Charge Rate | 11A         |
| Performance Marking     | W3-C2-V4-E2 |



#### Terminal Type

#### Cell Assembly Layout

#### Battery Hold-down

##### T1

Standard DIN Post

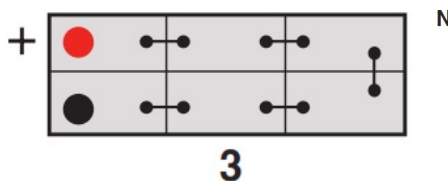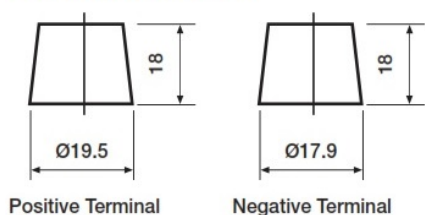

Data Sheet generated on 26/04/2024 - E&OE